
GM Series Touchless Faucet Deck Mounted







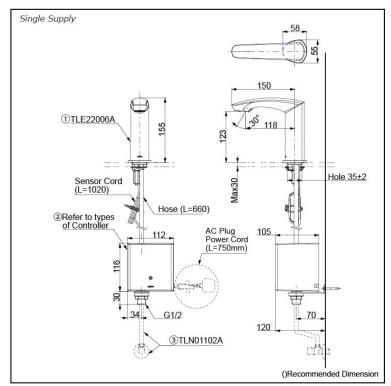

eatures

- Hands-free usage increases hygiene
- Sensor positioned underneath the spout head for more accurate user detection
- SELF POWER Technology: Self-generated power saves electricity (Controller: TLE03502A)
- WATER SAVING
- ECO CAP Technology: TOTO aerated bubble technology adds air to the water to achieve full water jet

Specifications 5

Flow Rate: 2L/min

Water Pressure: 0.05MPa ~ 0.75MPa Nickel Chrome

Parts description

Single Supply Combination


- AC Controller (220~240V)
 1. TLE22006A (Deck-mounted)
 2. TLE01502A (AC Operated BF Plug) OR TLE01502A1 (AC Operated C plug)
 3. TLN01102A (Stop Valve Set)*
- **Self Powered Controller**
 - 1. TLE22006A (Deck-mounted)
 2. TLE03502A (Self Powered)
 - 3. TLN01102A (Stop Valve Set)*
- **Battery Operated Controller**

 - 1. TLE22006A (Deck-mounted) 2. TLE04502A (Battery Operated) 3. TLN01102A (Stop Valve Set)*

NOTE

*For Thermostatic Please purchase TLE05701A (Thermostat) and TLN01103A (Stop Valve Set) instead

TOUCHLESS FAUCET

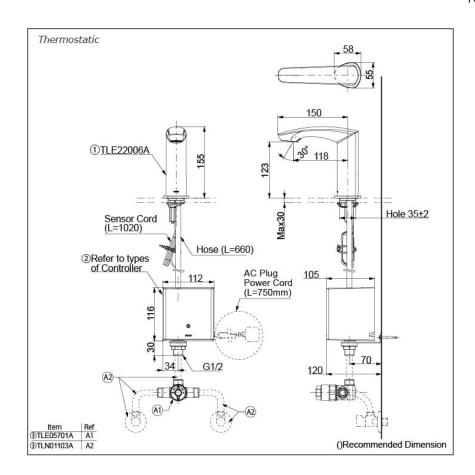

2/2