


TOILETS

NEOREST LS Luxurious Smart Toilet





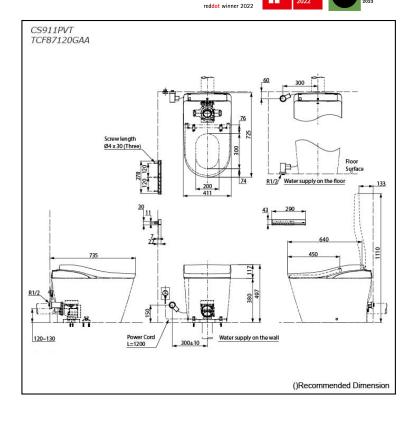

CS911PVT / TCF87120GAA

Features

- New TORNADO FLUSH uses less water to produce powerful streams of water that travels along a hairpin curve of new RIMLESS DESIGN bowl creating a 360 degree of cleaning power that washes every spot
- PREMIST, a fine spray of mist making it difficult for dirt to adhere
- EWATER+ not only keeps toilet bowl and nozzle clean by preventing bacterial with sanitizing effect but is also sprayed under the seat to prevent other accumulated waste, ensures a long-lasting cleanliness
- Automatic operation: Lid opens, closes and toilet flushes when sensor is activated
- AIR-IN WONDERWAVE uses air rich water droplets to produce comfortable cleaning sensation
- HEATED SEAT with temperature control
- Auto powerful DEODORIZER activates after every usage
- Adjustable WARM AIR DRYING
- Hybrid Ecology System
 WATER SAVING

Specifications

	Flush system:	TORNADO FLUSH
	Water Use:	4.5L / 3.0L
	Rough-in:	120~130 mm
	Bowl Shape:	D-Shape
	Water Pressure:	0.05MPa~0.75MPa
	Power Rating:	220~240V, 50/60Hz, 835~863W
	Length of Power Cord:	1.2 m
	Material:	Bowl -Vitreous China Seat & Cover -Plastic Remote Controller -Aluminium
	Size:	411Wx725Dx497H mm
P arts description		
•	CS911PVT Water Closet Bowl (P-Trap) (Rough-in120~130)	
•	TCF87120GAA WASHLET unit	
Optional Parts		
~	TE2D100\/D	

• T53P100VR Floor Flange

Golors

White (#NW1)

Silver - WASHLET Frame Cover - Remote Controller

12052025

Important Note

 Do not use other water then allowed by the laws and ordinances of the region of use. Only use portable water.

Do not use seawater or recycled water.

- This is an electrical product. Do not install it anywhere water is likely to get on the product or anywhere with humidity high enough that water is likely to form on the surface of this product. When using the product in a bathroom, install a fan or ventilation port and ensure good air flow through the bathroom.
- If the controller is not being used over a certain period of time, the batteries in the controller are highly recommended to be removed. Batteries in the remote controller are recommended to be replaced on a yearly basis.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.