CW927PZT / TCF95380GAA

NEOREST WX Luxurious Smart Toilet






















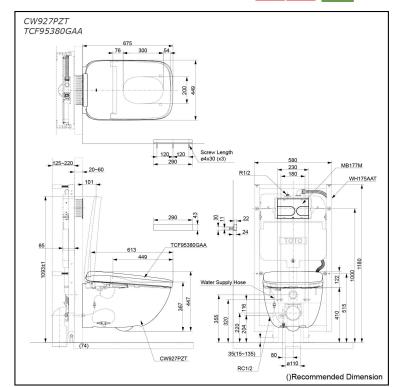

eatures

- New TORNADO FLUSH uses less water to produce powerful streams of water that travels along a hairpin curve of new RIMLESS DESIGN bowl creating a 360 degree of cleaning power that washes every spot
- PREMIST, a fine spray of mist making it difficult for dirt to adhere
- EWATER+ not only keeps toilet bowl and nozzle clean by preventing bacterial with sanitizing effect but is also sprayed under the seat to prevent other accumulated waste, ensures a long-lasting cleanliness
- Automatic operation: Lid opens, closes and toilet flushes when sensor is activated
- AIR-IN WONDERWAVE uses air rich water droplets to produce comfortable cleaning
- **HEATED SEAT** with temperature control
- Auto powerful DEODORIZER activates after every usage
- Adjustable WARM AIR DRYING

Specifications 5

TORNADO FLUSH Flush system:

Water Use: 4.5L / 3.0L Rough-in: H=220 mm Bowl Shape: Elongated

0.05MPa~0.75MPa Water Pressure: 220~240V, 50/60Hz, 834~845W Power Rating:

0.5 m

Length of Power Cord:

Material: Bowl -Vitreous China

Seat & Cover -Plastic Remote Controller

-Aluminium

Size: 449Wx675Dx447H mm

Parts description

- CW927PZT Water Closet Bowl (P-Trap) (Rough-in 220)
- TCF95380GAA WASHLET unit
- WH175AAT Concealed Cisten w/Frame
- **MB177M** Flush Panel



White (#NW1)

TOILETS

Important Note

 Do not use other water then allowed by the laws and ordinances of the region of use. Only use portable water.

Do not use seawater or recycled water.

- This is an electrical product. Do not install it anywhere water is likely to get on the product or anywhere with humidity high enough that water is likely to form on the surface of this product. When using the product in a bathroom, install a fan or ventilation port and ensure good air flow through the bathroom.
- If the controller is not being used over a certain period of time, the batteries in the controller are highly recommended to be removed. Batteries in the remote controller are recommended to be replaced on a yearly basis.